

NEW




- Modified model of UB7 that is a global standard for thermostats of hair dryers
- Quick thermal response due to an open type
- Available with the operating temperatures up to 130°C

Specifications

- Operating temp.: 70°C-130°C
(Available in increments of 5°C)
- Tolerance: ±5°C
- Differential: 30±15K (Standard)
- Ratings: 12A/125V AC,
6.5(1)A/250V AC

Dimensions

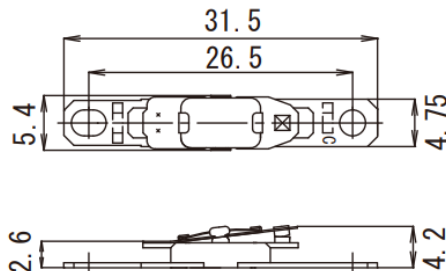

Applications

- Hair Dryers

Safety Approval

	Safety standards		Ratings	File No.
✓ Certified	UL/cUL	UL 60730-1, -2-9 cUL/CSA: E 60730-1, -2-9	12A/125VAC (Type 2.B) 6,000 cycles (resistive), 70°C-130°C	E50124
✓ Certified	VDE(EN)	EN 60730-1, EN IEC 60730-2-9	6.5(1)A/250VAC (Type 2.B) 10,000 cycles, 70°C-130°C	40011309
✓ Certified	CQC(GB)	GB/T 14536.1, GB/T 14536.10	12A/125VAC, 6.5A/250VAC (Type 2.B) 10,000 cycles (resistive), 70°C-130°C	CQC24002436939 CQC24002436940

CB TEST CERTIFICATE: IEC 60730-1, -2-9, 12A/125VAC, 6.5A/250VAC (Type 2.B), 10,000 cycles (resistive), 70°C-130°C
(issued on 2023-09-26, No. DK-145786-UL)